


Right Angle Female Connectors Type B For Daughter Cards

125 signal contacts50 mm without multifunction block




The ERmet type B female connector provides 125 contacts in a 5 row x 25 position fully loaded configuration.

The connector is designed for gas tight, pressfit installation and is provided in two different configurations: with integrated ground return shields and without integrated upper ground return shields. Lower ground return shields are available separately.

The ERmet type B female connector has an uninterrupted pin field with no multifunction cavity. This connector is not designed to be used alone, but is intended to be used in conjunction with either a type A, C, L, M or N ERmet connector.

Dimensional drawings and board hole pattern

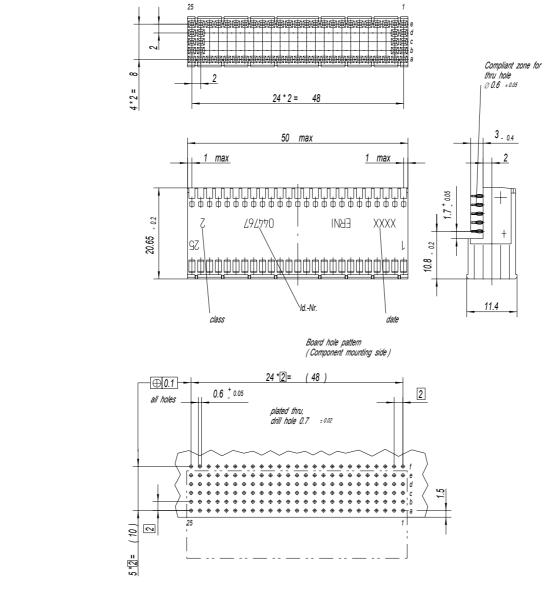

Right Angle Female Connectors Type B For Daughter Cards

Ordering Information

Configuration		Used For	No. of Pins	Part Number
Type B Without Shield, Without Peg 25 1 1 1 1 1 1 1 1 1 1 1 1 1	+		125	044767
Type B With Upper Shield, Without Peg 25 1 1 1 1 1 1 1 1 1 1 1 1 1	+		125	064179
Type B Without Shield, Without Peg 22 1 1 1 C C D D D D D D D D D D D	+	CompactPCI™ J2, J5	110	914797
Type B With Upper Shield 22 1 4 5 6 6 6 7 7 7 8 7 8 7 8 7 8 7 8 7 8 7 8 7 8 7 8 7 8 7 8 8	+	CompactPCI™ J2, J5	110	064785
Type B Without Shield, Without Peg 19 1 1 1 1 1 1 1 1 1 1 1 1		CompactPCI™ J3	95	914794
Type B With Upper Shield 19 1 1 1 1 1 1 1 1 1 1 1 1	+	CompactPCI™ J3	95	064784



Right Angle Female Connectors Type B For Daughter Cards

Ordering Information

Configuration	Used For	No. of Pins	Part Number
Upper Shield For Type B			
			044451
Lower Shield For Type B			
			044452
			044432
Upper Shield For Type B	<i>CompactPCI™</i>		
	J2, J5		914795
Lower Shield For Type B	<i>CompactPCI™</i>		
	J2, J5		064783
Upper Shield For Type B	<i>CompactPCI™</i>		
	J3		064781
Lower Shield For Type B	CompactPCI"		
	J3		064782